



AGRICOLD



AGRICOLD 302 / AGRICOLD 302 YF



CHARACTERISTICS

	AGRICOLD 302	AGRICOLD 302 YF
	SCG302R	SCG302H
TYPE OF REFRIGERANT		
AUTOMATIC WORKING CYCLE No manual taps	•	•
HIGH PRECISION RECOVERY FUNCTION	•	•
AUTOMATIC OIL INJECTION refillable/hermetic bottles (OIL LOCK)	•	•
AUTOMATIC DYE INJECTION refillable/hermetic bottles (OIL LOCK)	0-PK00096	✓
HEATER BELT INCLUDED	•	•
USB PORT	•	•
INTERNAL DATA BASE including commercial and agricultural vehicles	•	•
INTEGRATED AUTOMATIC NITROGEN AND FORMING GAS LEAK CHECK (CFU-NITRO / CFU-NITRO.HD.XX)	✓	✓
INTERNAL FLUSHING	•	•
READY TO USE ON HYBRID OR ELECTRIC CARS with rapid oil decontamination system	•	•
A/C SYSTEM PROFESSIONAL FLUSHING (ACC-FLUSHING)	✓	✓
A/C SYSTEM DIAGNOSYS	•	•
CONFIGURABLE GAS TYPE from HFO1234YF to --> R134a	0-PK00097	•
BLUETOOTH CONNECTION APP OKSY [®] GEN+	•	•



• STANDARD SUPPLY ✓ OPTION

ACCESSORIES

	CODE	DESCRIPTION	AGRICOLD 302	AGRICOLD 302 YF
	ACC-88.072	Gas bottle adapter ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter HFO1234YF		✓
	0-PK00051 0-PK00051 OPZ	Printer kit	✓	✓
	OAC0002-KIT	12 V Power supply	✓	✓
	ACC-0002	Antidust blanket		



NITROGEN LEAK CHECK OR HYDRO-NITROGEN


CODE CFU-NITRO



Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection


CODE CFU-NITRO.HD.XX

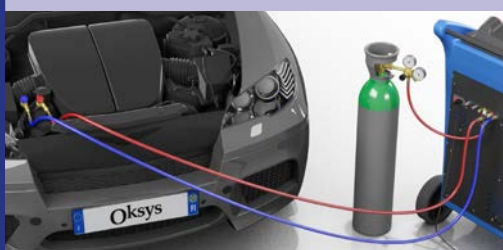

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection

FLUSHING

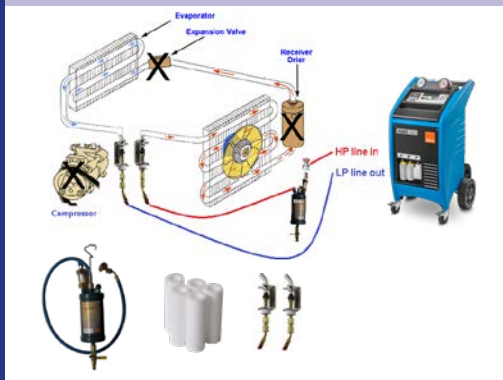CODE ACC-FLUSHING
ACC-FLUSHING.YF

Professional Refrigerant R134a or 1234y Flushing Kit. Including expansion cylinder.

RANGE

R134a



R1234yf



MODEL

AGRICOLD 302

AGRICOLD 302 YF

TECHNICAL FEATURES

Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	12 Kg	12 Kg
Heater Belt	YES	YES
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	10 cc	10 cc
Vacuum Pump	100 L/min	100 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz 12V DC	220V 50 Hz 12V DC
Dimensions	55x63x86 cm	48x68x88 cm
Weight	62 Kg	71 Kg
Packaging dimensions	68x57x100 cm	68x57x100 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Included	Included
Hoses	7,5 m	7,5 m
Blanket	Option	Option
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	Option	Option
2 x temperature probes	NO	NO



Oksys

TOTAL DESIGN FOR
BEST PERFORMANCE