


U-B30 U-B30Y

Ultra-Thin Wheel Free Scissor Lift
超薄小型剪式举升机

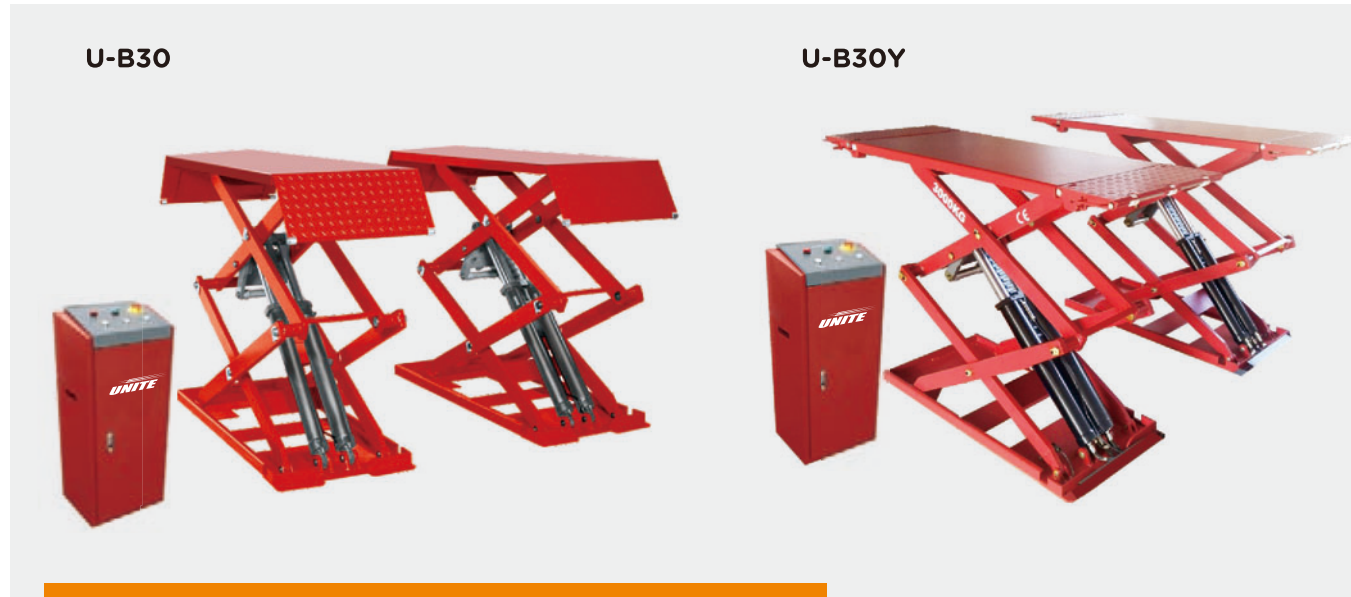


No ditch needed
免挖坑

Pneumatic Lock Release
气动解锁

Electromagnetic Lowering
电磁下降

U-B30+A = U-B30Y

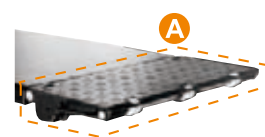

Allows to fix the ramp as an extendable platform, suits for long wheel base vehicles
上车板可固定用作平台延伸板，适合长底盘车型

OPTIONAL
可选配置




Drive-by-wire button
线控按钮




Photoelectric leveling
光电水平

FEATURES 安全特点



Precision machined safety lock
安全锁设计保证操作安全



Synchronized hydraulic cylinders system
同步4缸系统



Safety descending stop & alarm
二次下降，近地骤停警报提示



Safety valve for anti-explosion of hydraulic system
安全阀加强安全保护




Height limit switch
高度限位开关



Rubber pads
橡胶垫

DIMENSION 尺寸参数

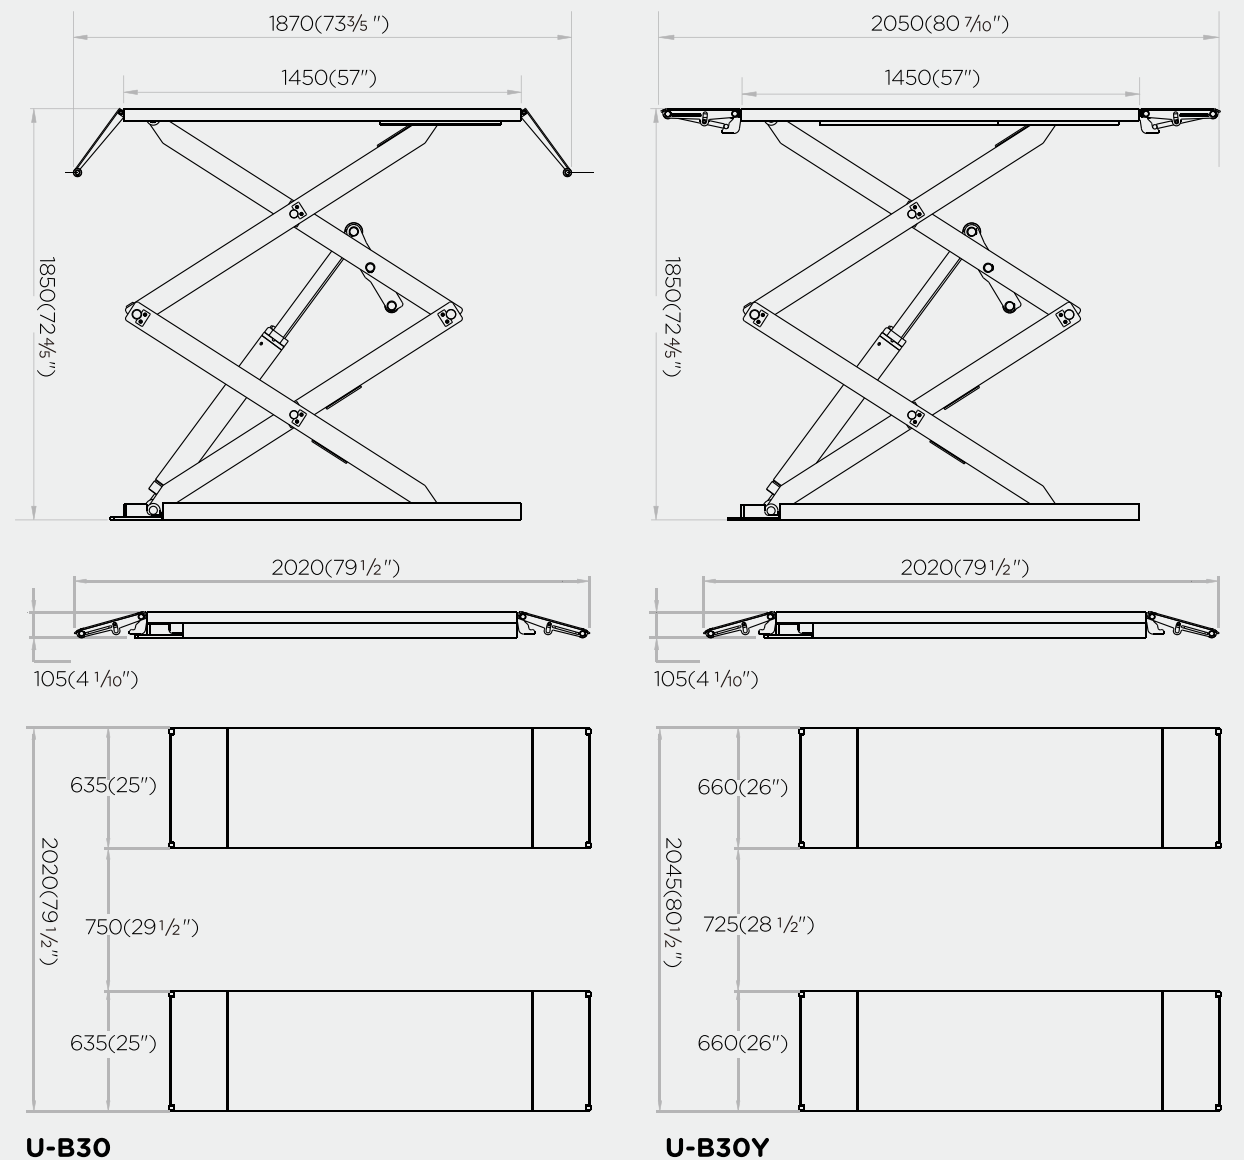

TECHNICAL DATA 技术参数

MODEL 型号	U-B30/B30Y
Capacity 举升重量	3.0 Ton
Lifting height 举升高度	1850mm(72 9/16")
Min height 平台高度	105mm(4 1/16")
Platform length 平台长度	2020mm(79 1/2")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW